



Display connection


Sketch map of network cable between LED display cabinets.(From front view)

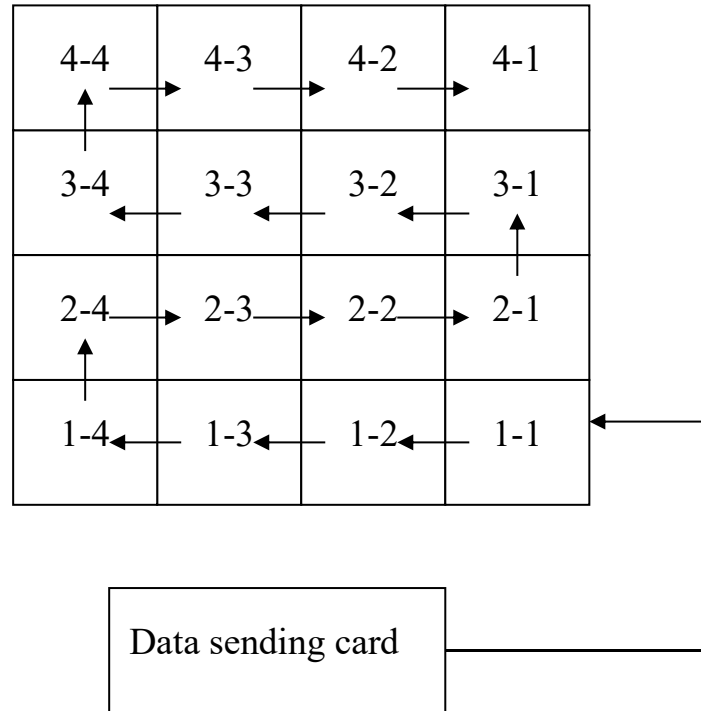


Please open LEDstudio software, then select “option” , select “software setup”.

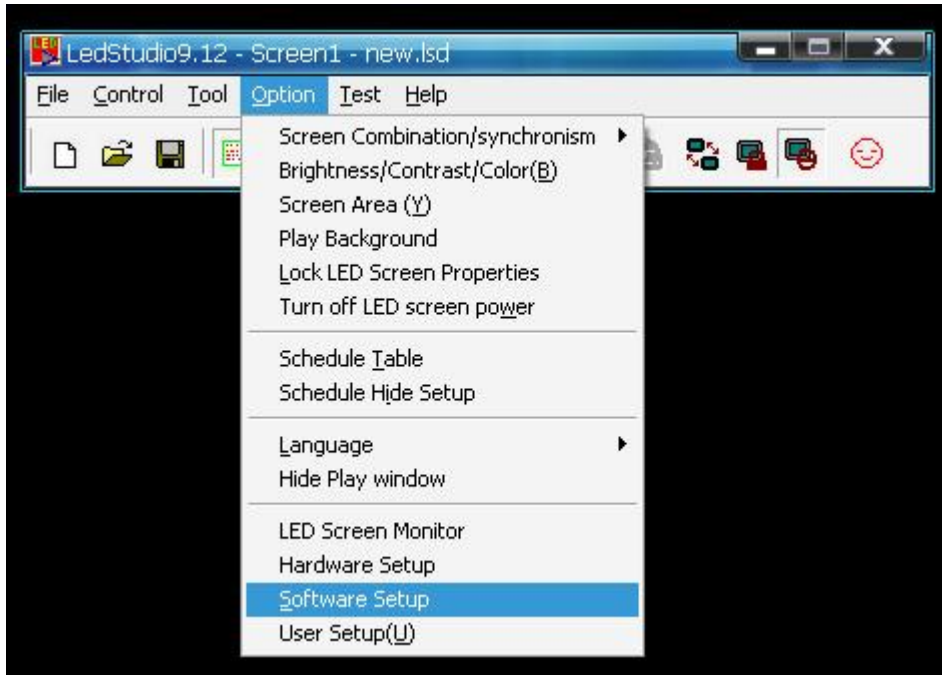



Please input lowercase letters “linsn” .

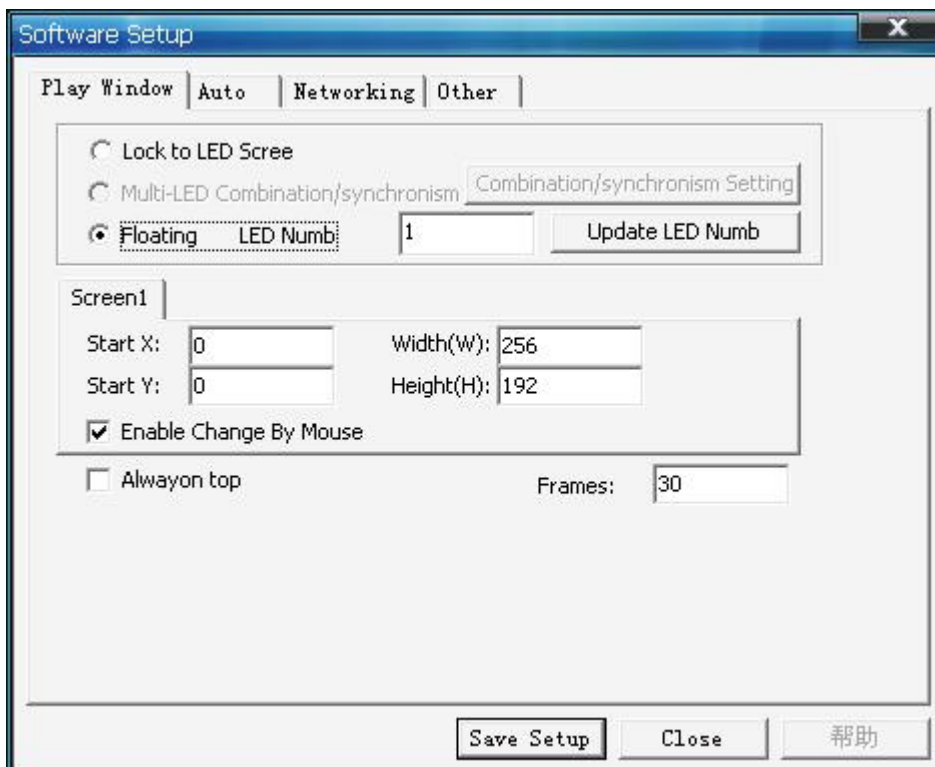

Please enter password “168”.

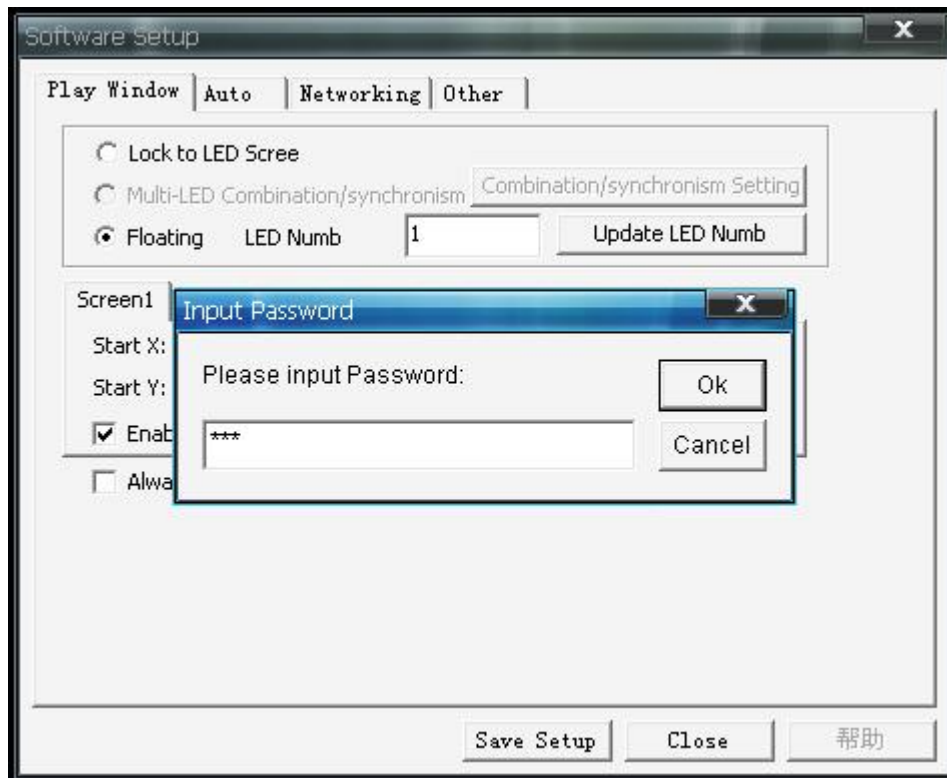

One sender page, choose the display mode same as the PC monitor resolution. Then save on sender. Please select “Display connection”.

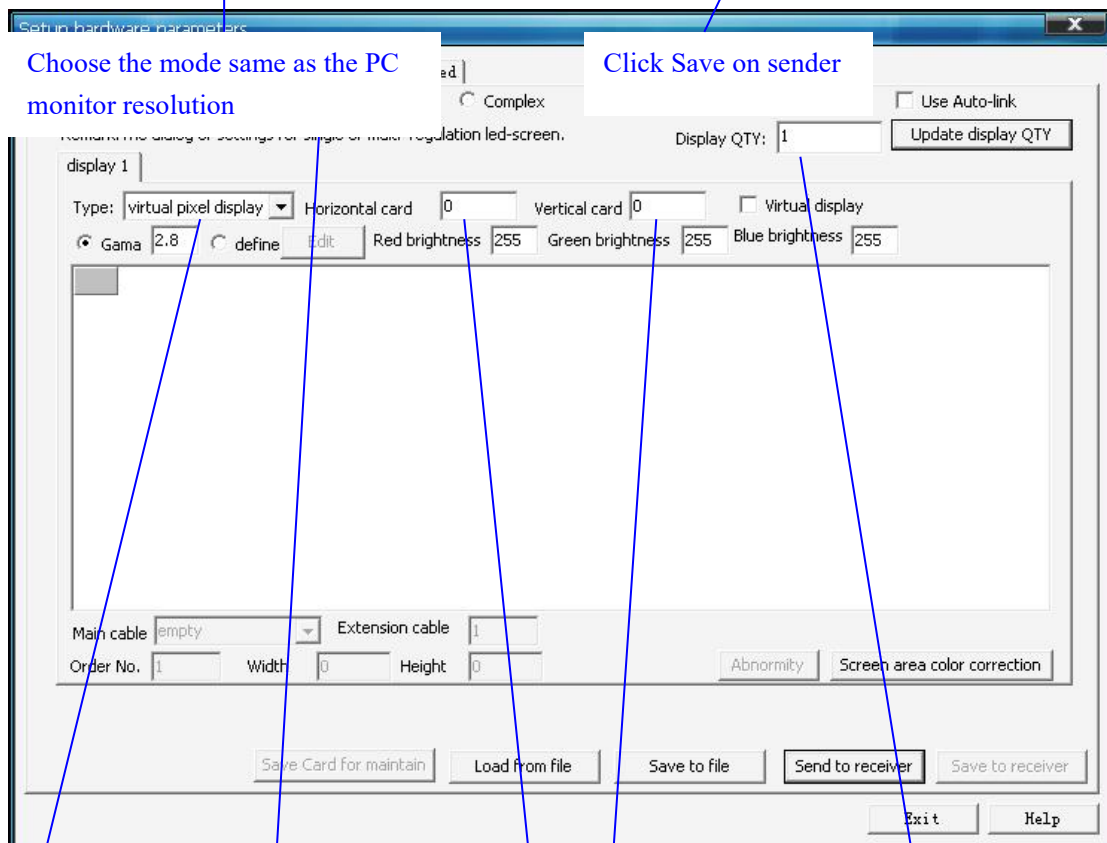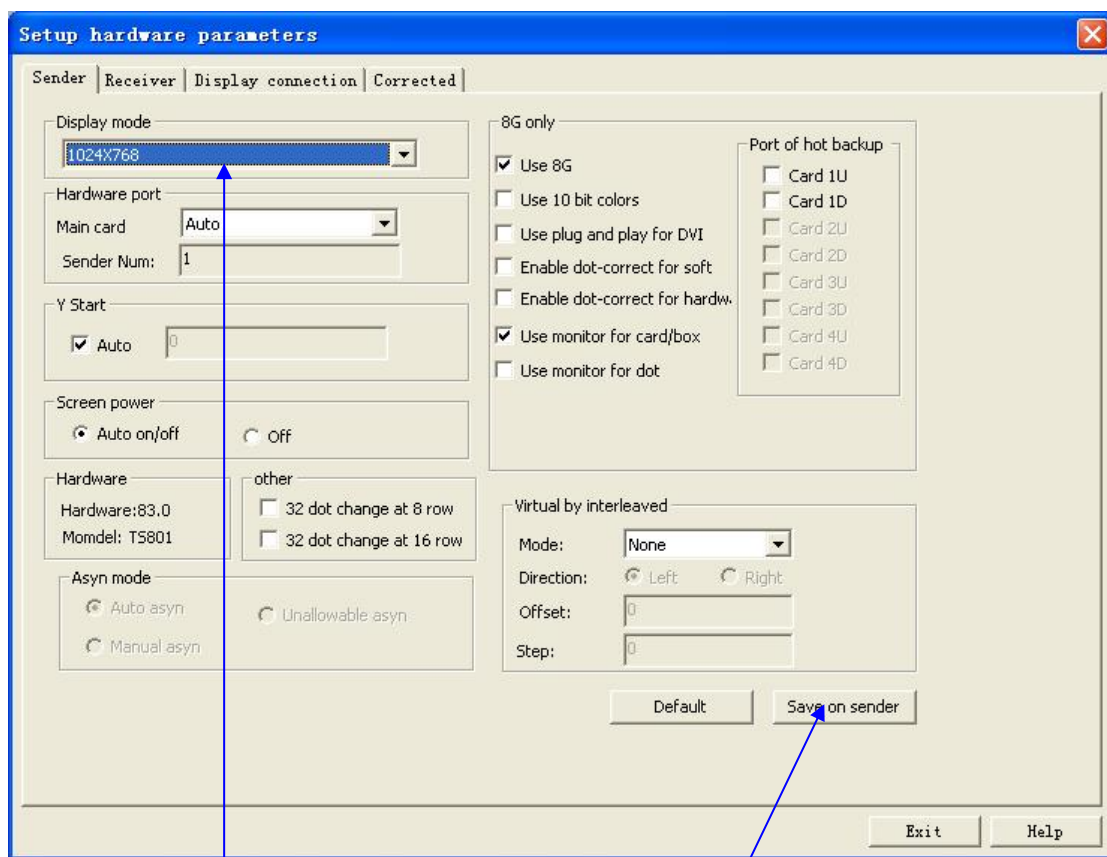

Choose the mode same as the PC monitor resolution

Click Save on sender




Choose the LED
screen type

Choose Normal

Please input 0,0 First

Input "1",then click Update
display QTY


According to the LED Display Screen input "horizontal card number" and "vertical card number", Then click the network cable into the cable box corresponding to the first position, and enter the receiving card set carried by pixel "width" and "high."

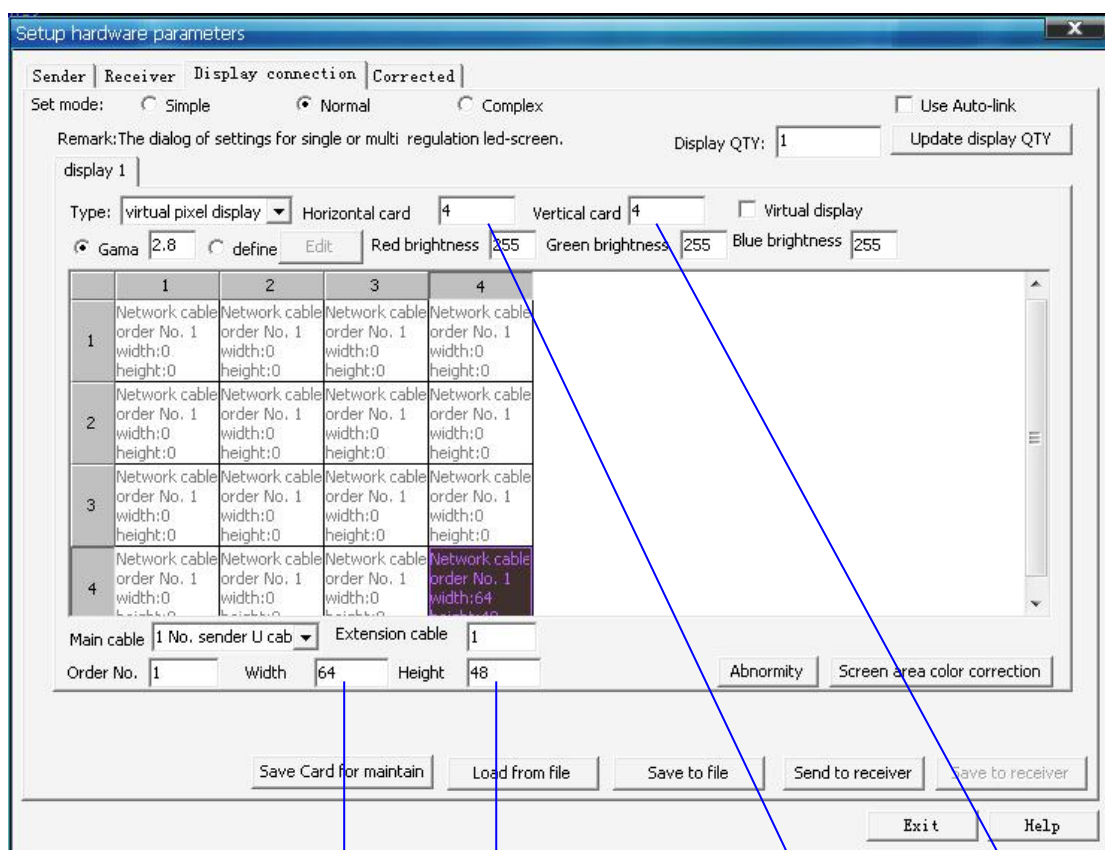



adjust every receiving card loading pixels

Please input receiving card quantity


According to the trend of cable, click the cable box link to the next.

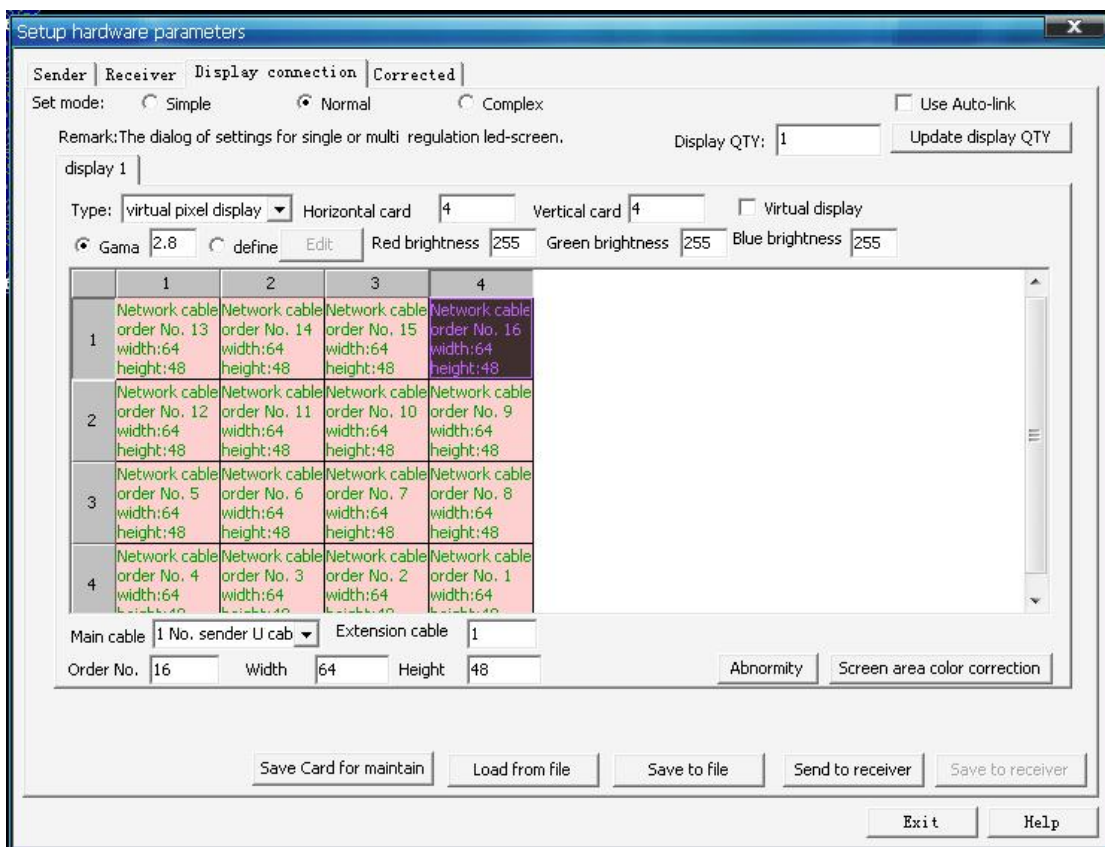



Then click “send to receiver”.

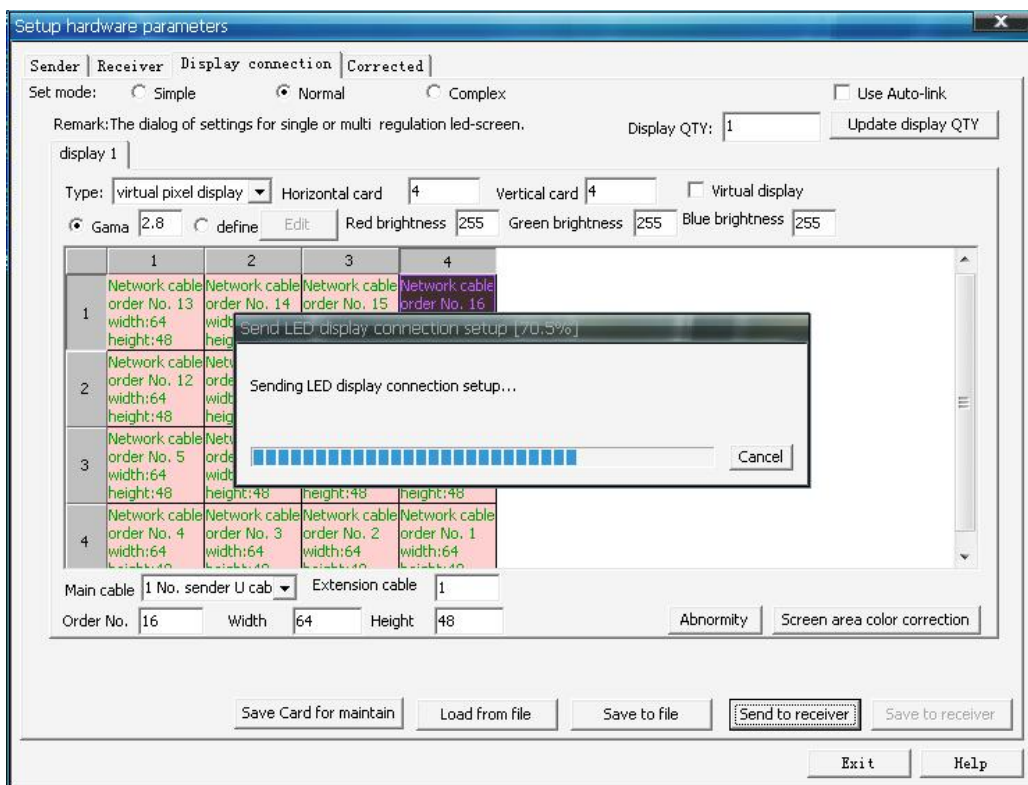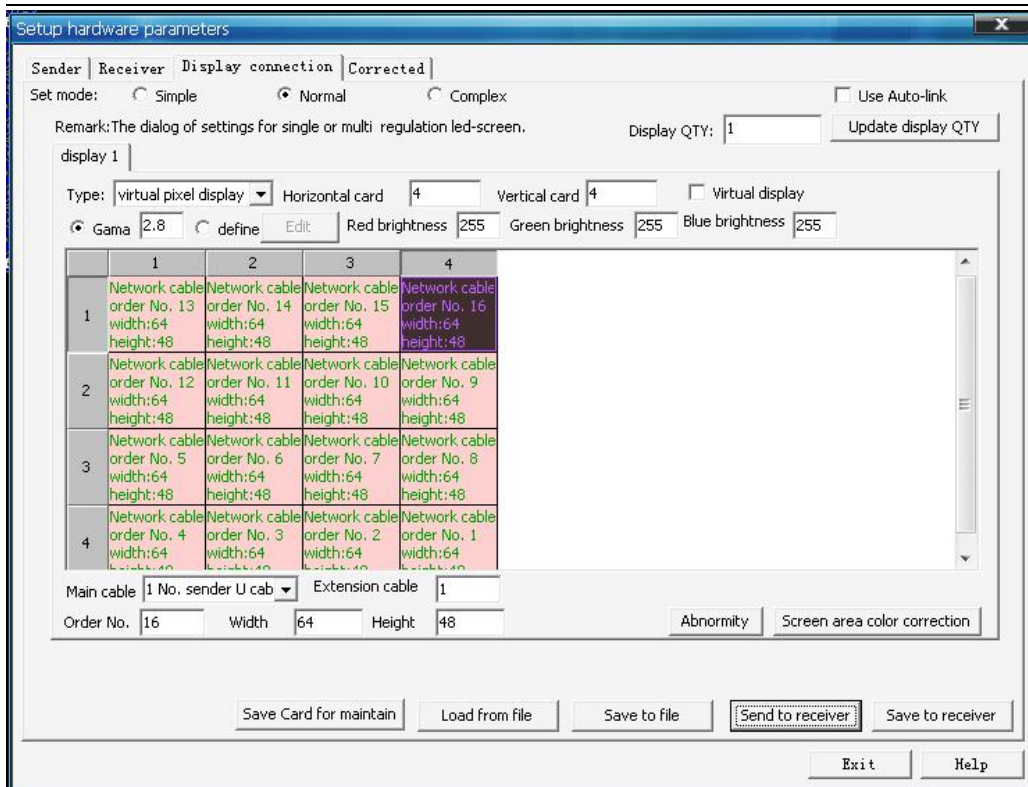


Please click “是（Y）”.

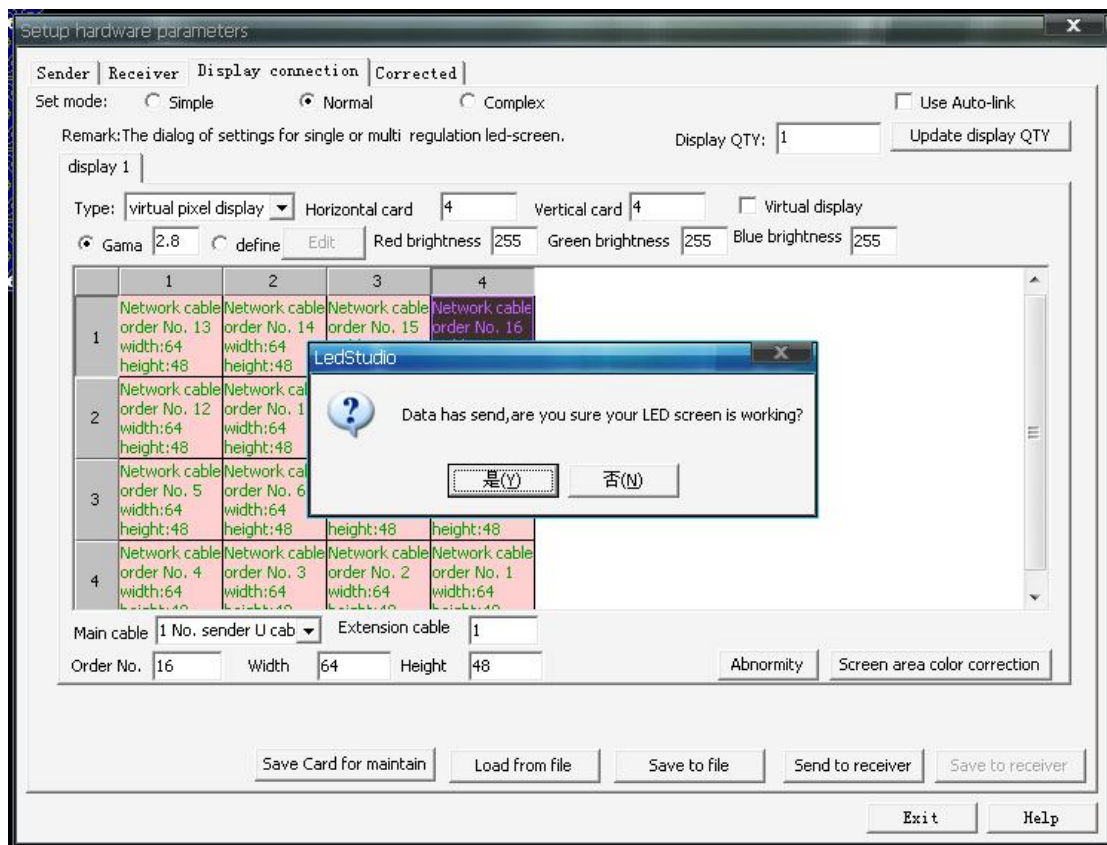

Please click “Save on receiver”.

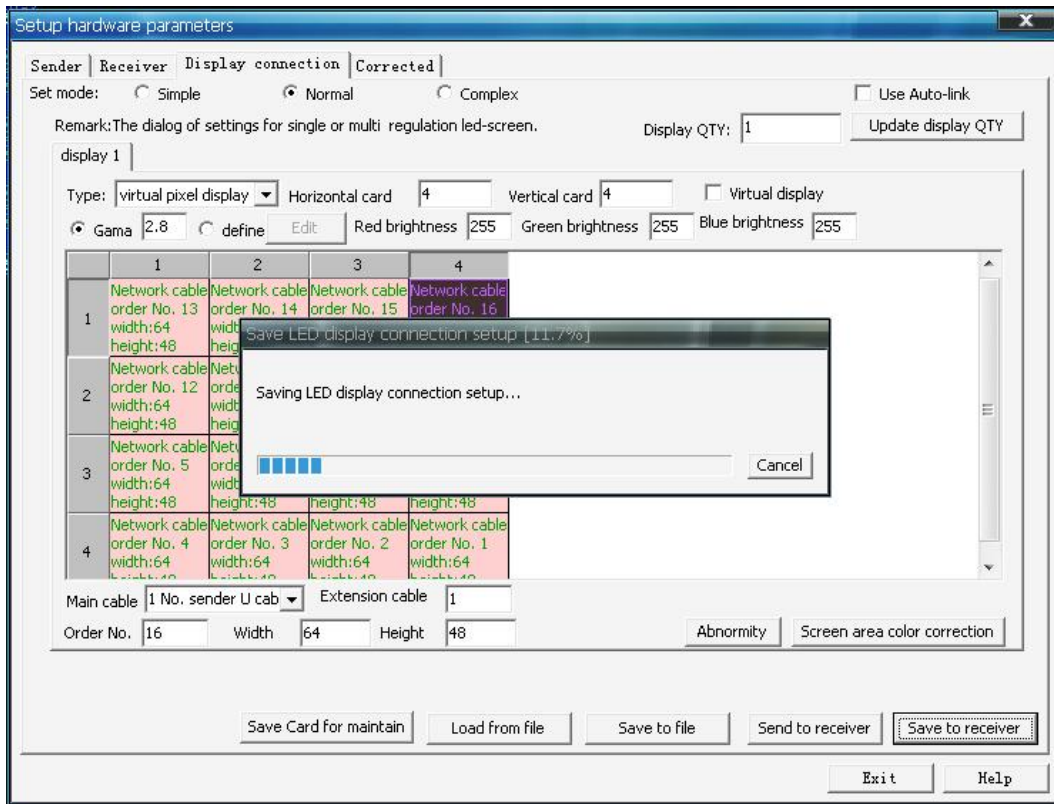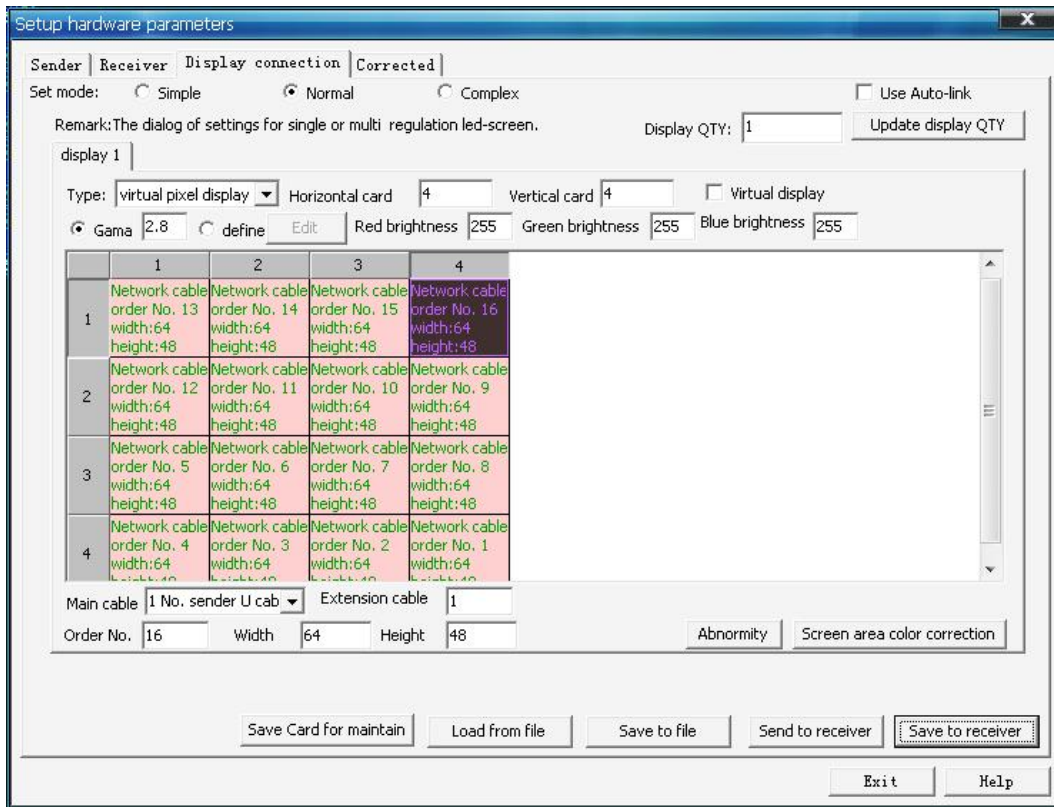

Please click “是 (Y)”.

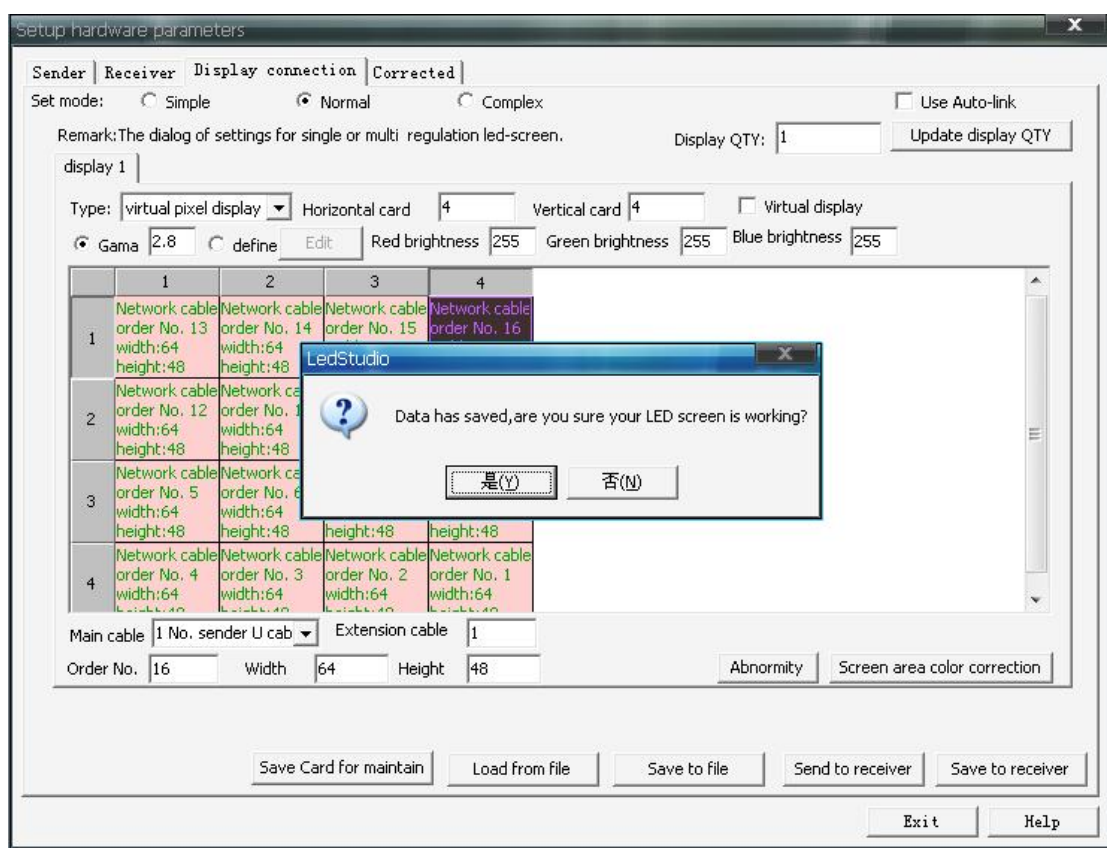

NOTICE: If you save the .CON file in the PC, you can Load from file directly.